



SAI DEEPA
ROCK DRILLING TOOLS
— JUST DRILL! —

TOP HAMMER ROCK DRILLING TOOLS **PRODUCT CATALOGUE**



www.saideepa.com



SAI DEEPA
ROCK DRILLING TOOLS
— JUST DRILL! —

Copyright © 2018 by SAI DEEPA ROCK DRILLS PVT. LTD.

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Sai Deepa Rock Drills Pvt. Ltd. For permission requests, write to Saideepa Rock Drills Pvt Ltd. Attention: Permissions Coordinator," at the address mentioned on the back page.

TABLE OF CONTENT

Introduction	2
Bit Face Design	3
Retrac Models	4
Button Shapes	5
Threaded Bits	7
Taper Bits and Rods	13
Shank Adapters	15
Coupling Sleeves	21
Extension and Drifter Rods	23
Specification Charts	28



GLOBAL CLIENTELE



INTRODUCTION

ABOUT SAIDEEPA

Sai Deepa is committed to continually develop, manufacture and distribute the best quality most economical rock drilling tools for mining, construction, water well and oil & gas segments, and provide the best possible value for its main stakeholders-customers, shareholders and employees. These tools are designed to transmit optimum impact energy into the rock with the least possible loss of energy, and are made to handle the toughest jobs around the globe. We plan to achieve market leadership through set of principles that guide decisions and behaviour throughout the company.

Each project needs to achieve the best possible operating costs and outcome for business. Complex rock formations and difficult terrain can be a real challenge for any driller. With a range of solutions and high quality durable top hammer drilling tool, Saideepa partners with you to succeed in reaching optimal project outcomes.


Top hammer rock drilling tools have been specially designed for hard to very hard and abrasive rock formations covering all construction, quarrying, mining drilling and blast applications. Tunneling is one of the most important customer segments and applications such as drifting and roof bolt hole drilling are well catered. Our bits have shown increase in penetration rate and also a substantially longer service life upto 20%


STANDARDS

Saideepa has established and applied Quality management system ISO 9001:2015, Environment management system ISO 14001:2015, Occupational health and Safety management system ISO 45001:2018 and Information security management system ISO 27001:2013 for design, manufacturing and supplying of DTH hammers and button bits. Our Integrated management system are inspected by DNV.GL from Norway and United Kingdom Accreditation Service (UKAS) from UK awarded us above all certificates.

CORE VALUES

• Safety • Customer Success • Team Play • Environmental Protection • Information Security

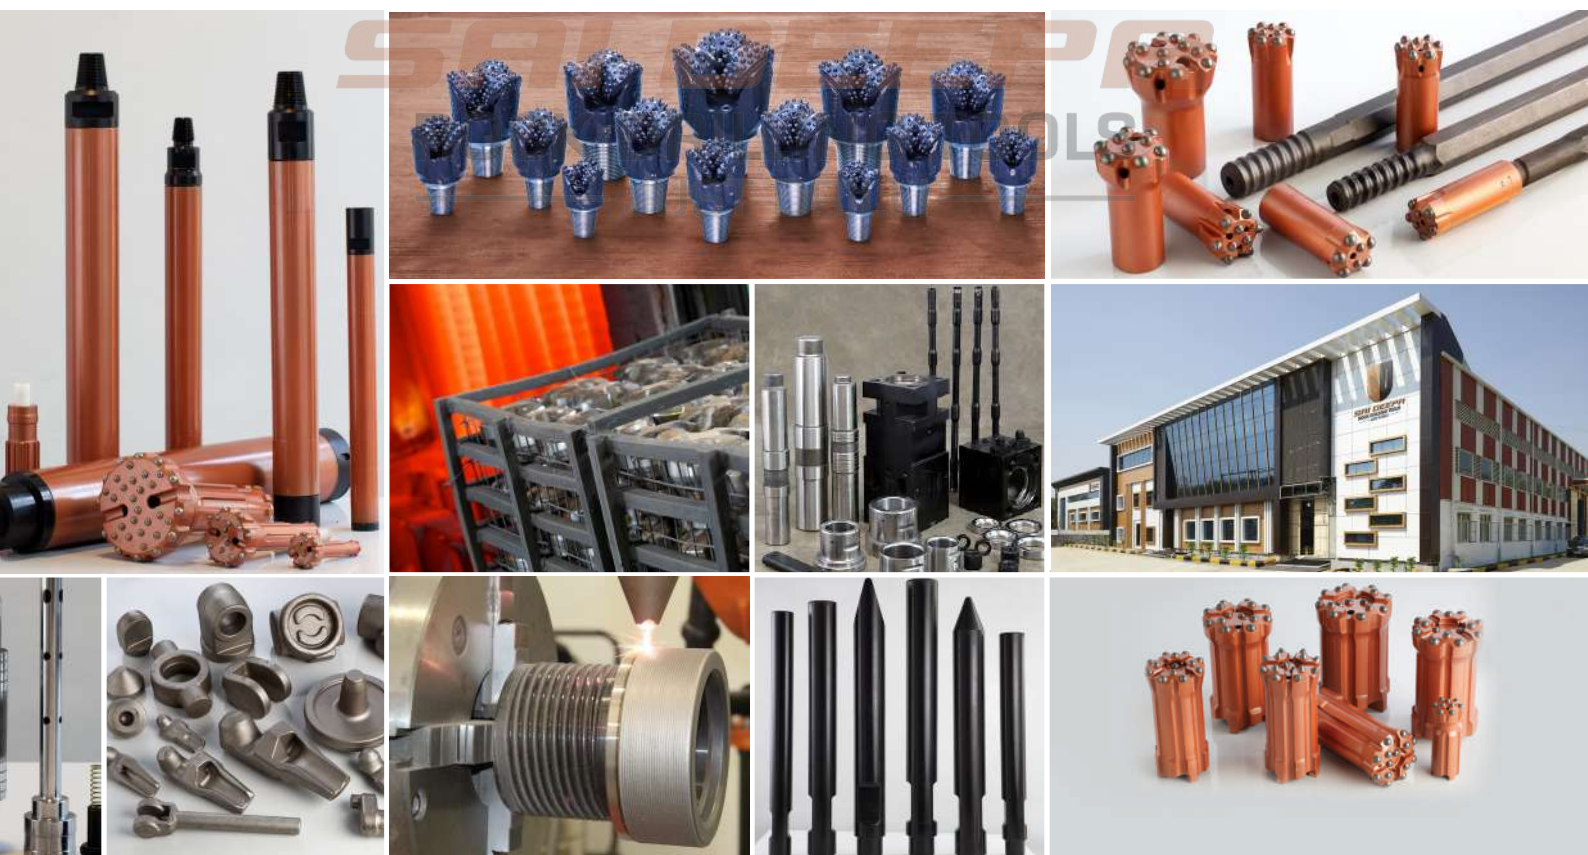



Concave

This type of face design will be used in medium hard and fissured rock formations and it controls hole deviation.




Convex

This type of face design will be used in medium hard and fissured rock formations and it gives faster penetration rates.



Flat

This type of face design is very aggressive in drilling application and is suited best for very hard rock formations and it gives good penetration rates.



Flat Face with Face Millings

This type of face design is best suited for very hard and medium type rock formations. The flat face bit drills straight holes while maintaining good penetration rates.



Drop Centre


This type of face design is best suited for less hard and medium type rock formations. The drop centre bit drills straight holes while maintaining good penetration rates.

RETRAC MODELS


Retrac Bits are suitable for powerful percussive drilling and the products are widely used in Drifting, Tunneling, UG production drilling, and bench drilling applications. Our products have been recognized as high-quality and cost-effective rock drilling tools globally.




STANDARD RETRAC

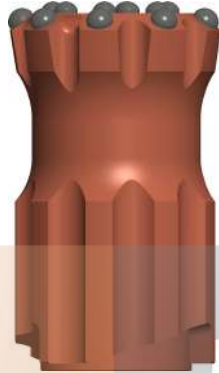

STRAIGHT SPLINE WITH
DEEP NECK RETRAC

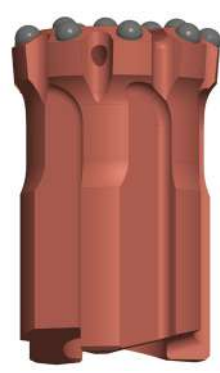

FLATBODY RETRAC

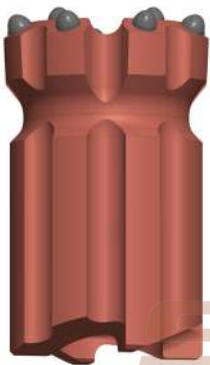

STANDARD RETRAC WITH
NECK RELIEF



FLAT BODY RETRAC WITH
NECK RELIEF

SAI LEEPA
ROCK DRILLING TOOLS
— JUST DRILL! —

Button Shapes





Spherical

This button is the most common shape used in threaded button bits. This shape is the strongest and most resistant to breakage. Spherical shape provides excellent penetration in medium rock, hard rock broken formations and in all types of drilling conditions.



Ballistic

Normally this button is used in soft drilling formations. This type of button tip protrudes out more so it is very aggressive and yields high penetration rates. Ballistic is prone to breakage if used in wrong formations.



Parabolic

Normally this button is used in medium soft to medium hard rock drilling formations. This type of button gives higher penetration than spherical and breakage resistant than ballistic.



Spike

Normally this button is used in soft and medium hard rock drilling formations.

Threaded Bits



THREADED BITS

R22 (7/8") Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	38	1 1/2"	4x9	2x8	25°	2	0	46-1422038YS
	38	1 1/2"	5x9	2x7	30°	1	1	46-1521038ZS
	41	1 5/8"	5x9	2x8	30°	1	1	46-1521041YS
	48	1 7/8"	5x11	2x8	30°	1	2	46-1522048TS

R25 (1") Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	33	1 5/16"	5x7	2x7	45°	1	1	46-252X033IS
	35	1 3/8"	5x9	2x7	25°	1	1	46-252X035ZS
	35	1 3/8"	5x8	2x7	35°	1	1	46-2521035ES
	38	1 1/2"	5x9	2x7	30°	1	1	46-2521038ZS
	38	1 1/2"	5x9	2x7	25°	1	1	46-252X038ZS
	41	1 5/8"	5x9	2x8	30°	1	1	46-2521041YS
	45	1 3/4"	5x11	2x8	30°	1	2	46-2522045TS
	45	1 3/4"	6x10	3x8	25°	3	1	46-2624045WP
	48	1 7/8"	6x10	3x8	30°	3	1	46-2624048WS
	51	2"	6x10	3x9	30°	3	1	46-2624051VS

Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	51	2"	6x10	3x9	30°	3	0	56-2627051VS/G
	51	2"	6x10	3x9	30°	3	0	M6-2627051VS/G

R28 (1 1/8") Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	38	1 1/2"	5x9	2x7	30°	1	1	46-3521038ZS
	41	1 5/8"	5x9	2x8	30°	1	1	46-3521041YS
	48	1 7/8"	6x10	3x8	30°	3	1	46-3624048WS
	48	1 7/8"	6x9	3x9	30°	3	1	46-3624048XP/G
	51	2"	6x10	3x9	30°	3	1	46-3624051VS


R32 (1 1/4") Thread Bits


Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	41	1 5/8"	5x9	2x8	30°	1	2	46-4522041YS
	43	1 11/16"	6x9	3x8	30°	3	1	46-4624043YS
	43	1 11/16"	5x10	2x8	35°	1	2	46-4522043WS
	45	1 3/4"	6x10	3x8	25°	3	1	46-4624045WS
	45	1 3/4"	5x11	2x8	30°	1	2	46-4522045TS
	48	1 7/8"	5x11	2x8	30°	1	2	46-4522048TS
	48	1 7/8"	6x10	3x8	30°	3	1	46-4624048WS
	51	2"	6x10	3x9	30°	3	1	46-4624051VS
	51	2"	6x11	2x9	30°	2	2	46-4622051SS
	57	2 1/4"	6x11	3x10	30°	3	1	46-4624057RS
	60	2 3/8"	6x11	3x10	35°	3	1	46-4624060RS
	60	2 3/8"	6x11	3x10	35°	3	1	46-4624060RS/G
	64	2 1/2"	8x10	4x9	30°	2	0	46-4841064VS
	64	2 1/2"	6x12	3x11	30°	1	1	46-46230643S
	76	3"	8x11	4x11	35°	2	0	46-48410761S
	76	3"	8x12	5x11	35°	2	2	46-4851076RD
	102	4"	8x12	6x12	35°	2	1	46-48621024S
	106	4 1/6"	8x14	6x12	35°	2	1	46-48621066S

THREADED BITS

R32 (1 1/4") Thread Bits

Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	45	1 3/4"	6x9	3x8	35°	3	0	56-4627045YP
	51	2"	6x10	3x9	30°	3	0	56-4627051VS
	51	2"	6x10	3x9	35°	3	0	H6-4624051VP/G
	57	2 1/4"	6x11	3x9	30°	3	0	56-4627057SF/G
	60	2 3/8"	6x10	4x9	35°	3	0	M6-464E060VP
	64	2 1/2"	6x12	3x10	35°	1	1	M6-46230642S
	64	2 1/2"	6x11	4x9	35°	3	0	M6-464E064SP
	64	2 1/2"	6x12	4x10	30°	3	0	56-46270642S/G
	64	2 1/2"	8x10	4x9	30°	2	0	56-4841064VF

Dome Bits	DIA		Thread	No. of Gauge Buttons Qty X Size	No. of Face Buttons Qty X Size	Flush Holes		Product No
	MM	Inch				Face	Side	
	89	3 1/2"	R32	8X13	7X13	2	2	86-08948S
	102	4"	R32	8X13	9X13	2	2	86-1024JS

Reaming Bits 12° Taper	Diameter		No. of Gauge Buttons Qty X Size	No. of Face Buttons Qty X Size	Angle	Product No
	MM	Inch				
	89	3 1/2"	8X12	4X10	35°	76-089122S
	102	4"	8X12	4X12	35°	76-102124S

Pilot Adapter 12° Taper	Insert Width		Thread	Product No
	MM	Inch		
	40		R32	78-040412

R38 (1 1/2") Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	64	2 1/2"	8x10	4x9	30°	2	0	46-5841064VS
	64	2 1/2"	8x10	4x10	30°	2	2	46-5843064US
	70	2 3/4"	6x11	4x11	30°	3	0	46-564E0704P
	76	3"	8x11	4x11	35°	2	2	46-58430761S


Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	64	2 1/2"	6x12	3x10	35°	1	1	56-56230642S
	68	2 2/3"	6x12	4x10	35°	3	0	56-564E0682P
	115	4 1/2"	8x14	7x12	35°	4	0	56-587E1154P

T35 (1 1/3") Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	51	2"	6x10	3x9	30°	3	1	46-H624051VS
	54	2 1/8"	5x12	2x10	30°	2	1	46-H5230542P


THREADED BITS

T38 (1 1/2") Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	64	2 1/2"	6x12	3x11	30°	3	0	46-A6270643S/M
	68	2 2/3"	8x10	4x10	30°	2	2	46-A843068US
	70	2 3/4"	7x12	4x10	35°	3	0	46-A7530702S/G
	76	3"	8x12	5x11	35°	2	2	46-A8510763S/G
	76	3"	7x12	4x11	35°	3	0	46-A7530763P/G
	89	3 1/2"	8x12	6x12	35°	2	2	46-A8630894B/G
	102	4"	8x14	5x14	35°	2	0	46-A8521028S
	127	5"	8x16	7x14	35°	2	0	46-A871127QS/G

Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	64	2 1/2"	6x11	4x10	35°	3	0	56-A629064RP/G
	76	3"	6x12	4x11	35°	3	0	56-A64E0763P
	76	3"	7x12	4x11	35°	3	0	M6-A7530763S/G
	76	3"	8x12	4x11	35°	2	1	M6-A8420763S
	89	3 1/2"	9x12	6x12	35°	3	0	M6-A9610894S/G
	95	3 3/4"	8x11	6x11	35°	4	1	M6-A86F0951P
	105	4 1/6"	8x12	6x11	35°	4	1	M6-A86F1053P


T45 (1 3/4") Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	70	2 3/4"	7x12	4x10	35°	3	0	46-B7530702S/G
	76	3"	7x11	5x10	35°	3	0	46-B754076RP
	76	3"	8x12	5x11	35°	2	2	46-B8510763D/G
	85	3 11/32"	8x12	6x11	35°	2	2	46-B8630853S/G
	89	3 1/2"	6x13	5x12	35°	3	0	46-B65D089KB
	89	3 1/2"	8x12	6x12	35°	2	2	46-B8630894B/G
	89	3 1/2"	9x12	6x11	35°	3	0	46-B9610893S/G
	102	4"	8x14	6x13	35°	4	0	46-B86E1027S
	102	4"	9x14	7x12	35°	3	0	46-B9711026S/G
	105	4 1/6"	8x14	6x13	35°	2	2	46-B8631057S/G
	115	4 1/2"	8x14	8x12	35°	2	0	46-B8811156S
	115	4 1/2"	9x14	9x12	35°	3	0	46-B9911156S/G


Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	76	3"	8x11	4x11	35°	2	0	56-B8410761S
	89	3 1/2"	8x14	6x12	35°	2	0	56-B8610896S
	89	3 1/2"	8x12	4x12,2x11	35°	4	0	56-B86G0893P
	95	3 3/4"	8x13	6x12	35°	4	1	56-B86F095KP
	102	4"	8x12	7x12	35°	2	0	56-B8711024S/G
	102	4"	8x14	4x13,2x12	35°	4	0	56-B86G1024S
	105	4 1/6"	8x12	6x11	35°	4	1	M6-B86F1053P
	107	4 1/6"	8x12	6x11	35°	4	1	M6-B86F1073P
	110	4 1/3"	8x12	7x12	35°	4	1	M6-B87E1104P
	115	4 1/2"	8x14	6x12	35°	4	0	56-B86E1156P
	127	5"	8x14	7x13	35°	4	0	M6-B87E1277P
	140	5 1/2"	8x14	7x14	35°	4	0	M6-B87E1408P
	140	5 1/2"	9x16	9x14	35°	3	0	56-B99F140QP
	146	5 3/4"	8x14	8x14	35°	4	0	M6-B88F1468P
	146	5 3/4"	9x14	9x14	35°	3	0	56-B99F1468P
	152	6"	9x16	6x14,4x13	35°	3	0	56-B90F152GP
	152	6"	8x14	8x14	35°	4	0	M6-B88E1528P

THREADED BITS


T45 Thread Bits

Dome Reaming Bit	BIT diameter		Pilot Dia MM	Buttons Qty x Size, mm		Flushing Holes	Product No
	MM	Inch		Gauge	Face		
	102	4"	57	8x12	4x12	4	77-B571024S
	127	5"	64	8x14	4x14	4	77-B641278S
	152	6"	64	8x14	8X14	4	77-B641528S

T51 (2") Thread Bits


Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	89	3 1/2"	6x13	5x12	35°	3	1	46-C65E089KS
	89	3 1/2"	8x12	6x12	35°	2	2	46-C8630894P/G
	89	3 1/2"	8x12	6x12	35°	4	2	46-C8610894S
	89	3 1/2"	9x11	6x12	35°	3	1	46-C962089RS/G
	102	4"	8x14	6x13	35°	2	2	46-C8631027P/G
	102	4"	6x19	4x14	35°	2	0	46-C625102PS
	102	4"	8x14	6x13	35°	4	0	46-C86E1027S
	115	4 1/2"	10x14	7x14	30°	3	0	46-C0711158S/G
	115	4 1/2"	8x14	7x13	35°	2	0	46-C8711157S/G
	115	4 1/2"	8x16	6x14	35°	4	0	46-C86E115QS
	115	4 1/2"	7x19	5x14	35°	2	0	46-C751115PS/G
	127	5"	8x16	6x14	35°	4	0	46-C86E127QS
	127	5"	8x16	7x14	35°	2	0	46-CK87127QS/G
	127	5"	8x16	6x16	35°	2	2	46-C863127DP/G
	140	5 1/2"	8x16	8x14	35°	2	0	46-C881140QS/G
	152	6"	8x16	4x16,4x14	35°	4	0	46-C86j152QS

T51 (2") Thread Bits

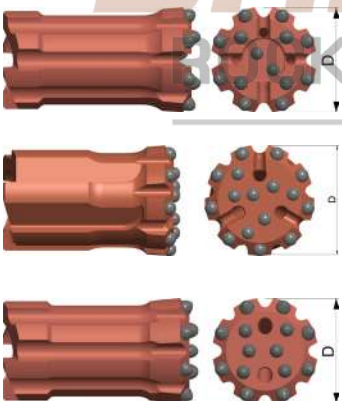Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	89	3 1/2"	6x11	6x10	35°	3	1	M6-C962089RB/G
	89	3 1/2"	6x13	5x12	35°	3	1	56-C65E089KS
	89	3 1/2"	8x13	6x12	35°	2	1	M6-C862089KS/G
	89	3 1/2"	8x14	6x12	35°	2	0	56-C8610896S
	89	3 1/2"	8x12	4x12,2x11	35°	4	0	56-C86G0893P
	89	3 1/2"	9x13	6x11	35°	3	1	M6-C9620895S/G
	92	3 5/8"	8x13	6x12	35°	2	0	56-C861092KP
	95	3 3/4"	9x13	6x12	35°	3	0	M6-C961095KS/G
	102	4"	8x14	4x13	35°	4	0	56-C86G102NS
	102	4"	8x14	6x13	35°	2	2	M6-C8631027B/G
	102	4"	8x12	7x11	35°	4	0	56-C87G1023P
	102	4"	9x13	6x13	35°	3	1	H6-C962102JP/G
	105	4 1/6"	8x12	6x11	35°	4	1	M6-C86F1053P
	107	4 1/6"	8x12	6x11	35°	4	1	M6-C86F1073P
	115	4 1/2"	8x14	4x14,2x12	35°	4	0	56-C87G1156S
	115	4 1/2"	8x14	8x12	35°	2	0	56-C8811156S/G
	115	4 1/2"	8x16	6x14	35°	4	0	56-C86E115QS
	127	5"	8x16	6x16	35°	2	2	M6-C863127DP/G
	127	5"	8x14	7x14	35°	4	0	56-C87D1278P
	140	5 1/2"	8x14	7x14	35°	4	0	M6-C87E1408P
	146	5 3/4"	8x14	8x14	35°	4	0	M6-C88F1468P
	146	5 3/4"	9x16	9x14	35°	3	0	56-C99F146QP
	152	6"	8x14	8x14	35°	4	0	M6-C88E1528P


THREADED BITS

ST58 Thread Bits


Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	89	3 1/2"	8x12	4x12,2x10	35°	4	0	56-F86G0892S
	102	4"	10X12	8X12	35°	4	0	56-F08D1024P
	115	4 1/2"	10X14	8X12	35°	4	0	56-F08D1156S
	127	5"	8X14	7X14	35°	4	0	56-F87E1278S

Dome Reaming Bit	BIT diameter		Pilot Dia	Buttons Qty x Size, mm		Flushing Holes	Product No
	MM	Inch	MM	Gauge	Face		
	152	6"	76	8x14	8X14	6	77-F761528S
	204	8"	80	9x16	10X16	3	77-F80204DP

ST61 Thread Bits

Button Bit - Regular	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	115	4 1/2"	8x16	6x14	35°	4	0	46-E86E115QS
	140	5 1/2"	8x16	8x14	35°	2	0	46-E881140QS/G
	140	5 1/2"	12x16	10x14	35°	3	0	46-ES01140QS/G

ST61 Thread Bits

Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	92	3 5/8"	6X13	3X12,2x11	35°	3	0	56-EK65092FB/G
	92	3 5/8"	8X13	4X12,2x11	35°	4	0	56-E86E092FF
	92	3 5/8"	9X12	8X11	35°	3	0	56-E98X0923B/G
	102	4"	9x13	6x13	35°	3	1	H6-E962102JS/G
	102	4"	8X13	4X13,2x11	35°	4	0	56-E86E1025F
	115	4 1/2"	9X16	6X14	35°	3	0	56-E961115QS/G
	127	5"	9X18	7X16	35°	3	0	H6-E971127CS/G
	152	6"	12x16	10x16	35°	3	0	H6-ES011524S/G

ST68 Thread Bits

Button Bit - Retrac	BIT diameter		Buttons Qty x Size, mm		Angle	Flushing Hole		Product No
	MM	Inch	Gauge	Face		Face	Side	
	102	4"	10X12	8X12	35°	4	0	56-G08D1024P
	115	4 1/2"	10X14	8X12	35°	4	0	56-G08D1156S
	127	5"	8X14	7X14	35°	4	0	56-G87E1278S

Dome Reaming Bit	BIT diameter		Pilot Dia	Buttons Qty x Size, mm		Flushing Hole	Product No
	MM	Inch	MM	Gauge	Face		
	152	6"	76	8x14	8X14	6	77-G761528S
	204	8"	80	9x16	10X16	3	77-G80204DP


Taper Bits & Rods



SANDEPA
ROCK DRILLING TOOLS
— JUST DRILL! —

TAPER BITS

7° Taper Angle



BIT diameter		Buttons Qty x Size, mm		Flushing Hole		Product No
MM	Inch	Gauge	Face	Face	Side	
30	1 3/16"	4x7	1x7	1	1	66-0741330ZP
32	1 1/4"	5x7	2x7	1	1	66-0752X32ZP
32	1 1/4"	6x7	2x7	2	2	66-0763X32ZP
35	1 3/8"	6x7	2x7	2	1	66-0762X35ZP
38	1 1/2"	4x8	2x8	1	0	66-0742138YP
41	1 5/8"	5x9	2x8	1	1	66-0752X41UP

11° Taper Angle



BIT diameter		Buttons Qty x Size, mm		Flushing Hole		Product No
MM	Inch	Gauge	Face	Face	Side	
32	1 1/4"	6x7	2x7	2	2	66-1163X32ZP
38	1 1/2"	5x9	2x7	1	1	66-1152X38XP
40	1 37/64"	5x9	2x7	1	1	66-1152X40XP

12° Taper Angle



BIT diameter		Buttons Qty x Size, mm		Flushing Hole		Product No
MM	Inch	Gauge	Face	Face	Side	
32	1 1/4"	6x7	2x7	2	2	66-1263X32ZP
35	1 3/8"	6x7	2x7	2	1	66-1262X35ZP
38	1 1/2"	5x9	2x7	1	1	66-1252X38XP
40	1 37/64"	5x9	2x7	1	1	66-1252X40XP

TAPER RODS

Taper Rod, Shanks 22 x 108



Taper	Length	Product No
7°	610	68-0722-06
7°	1220	68-0722-12
7°	1830	68-0722-18
7°	1980	68-0722-20
7°	2440	68-0722-24
7°	3050	68-0722-31
7°	3660	68-0722-37

Taper Rod, Shanks 22 x 108



Taper	Length	Product No
11°	1220	68-1122-12
11°	1830	68-1122-18
11°	1980	68-1122-20
11°	2440	68-1122-24
11°	3050	68-1122-31

Taper Rod, Shanks 22 x 108



Taper	Length	Product No
12°	610	68-1222-06
12°	1220	68-1222-12
12°	1830	68-1222-18
12°	2440	68-1222-24
12°	3050	68-1222-31
12°	3660	68-1222-37

Taper Rod, Shanks 25 x 108



Taper	Length	Product No
7°	610	68-0725-06
7°	1220	68-0725-12
7°	1830	68-0725-18
7°	1980	68-0725-20

Taper Rod, Shanks 25 x 108



Taper	Length	Product No
12°	610	68-1225-06
12°	1220	68-1225-12
12°	1830	68-1225-18
12°	2440	68-1225-24
12°	3050	68-1225-31
12°	3660	68-1225-37

Shank Adapters

SAI DEEPA
ROCK DRILLING TOOLS
— JUST DRILL! —



SHANK ADAPTERS

SANDVIK

HLX 1	Thread	Length	Product No	WEIGHT (KG)
	R25	255	88-2-7567-01	1.1

HL 300	Thread	Length	Product No	WEIGHT (KG)
	R32	400	88-4-7549-01	2.6

HL 500 S-38 / 510 S-38 / 510 B / 510 LH	Thread	Length	Product No	WEIGHT (KG)
	R38	500	88-5-7536-01	4.5
	T38	500	88-A-7536-01	4.4

HL 550 SUPER / HL560 SUPER / HL510 S-45	Thread	Length	Product No	WEIGHT (KG)
	T38	500	88-A-7554-01	5.2
	R32	550	88-4-7557-01	5.2
	T35	550	88-H-7557-01	5.4
	T38	550	88-A-7557-01	5.6

HLX 5 / HLX 5T	Thread	Length	Product No	WEIGHT (KG)
	R32	500	88-4-7585-01	5.1
	R38	500	88-5-7585-01	5.2
	T38	500	88-A-7585-01	5.1
	T38	575	88-A-7586-01	5.7

RD 314	Thread	Length	Product No	WEIGHT (KG)
	T38	410	88-A-7672-01	3.5

HL700/HL710-45/HL800T-45/HL810T-45/ HF810T-45/HL650-45	Thread	Length	Product No	WEIGHT (KG)
	T45	600	88-B-7576-01	7.3

HL700/HL710-52/HL710PE-52/HL700LH/ HL710S-52/HL710SPE-52/T45/HL650-52/ HL800T-52/HL800T/PE-52/HL810T-52/ HF810T-52	Thread	Length	Product No	WEIGHT (KG)
	T38	600	88-A-7577-02	8.4
	T45	600	88-B-7577-02	8.6
	T51	600	88-C-7577-03	9.1

SHANK ADAPTERS

HL1000/HL 1010, HL1000S/HL 1010S-52	Thread	Length	Product No	WEIGHT (KG)
	T51	670	88-C-6010-02	10.2

HL1000PE-65, HL1010PE-65, HL1060T/PE-65, HL1500T/PE-65, HL1560T/PE-65	Thread	Length	Product No	WEIGHT (KG)
	T51	760	88-C-6025-02	15.6
	ST61/GT60	760	88-E-6025-02	16.7

HL 1500-80/1560T-80/HL1060T-80/HF1560, Shoulder drive	Thread	Length	Product No	WEIGHT (KG)
	ST61/GT60	760	88-E-6030-05	20.7

HL 1500T/PE-90/HL1500ST/PE-90/ HL1560T/PE-90/HL1560ST/PE-90/HL1560T/PE-90/HL1560ST/PE-90	Thread	Length	Product No	WEIGHT (KG)
	ST58	635	88-F-6035-01	21.8
	ST68	635	88-G-6035-05	22.7

ATLAS COPCO

COP BBC 42, BBC 44, BBC 100	Thread	Length	Product No	WEIGHT (KG)
	R32	380	88-4-15858-00	2.1

COP BBC 54, BBC 120	Thread	Length	Product No	WEIGHT (KG)
	R32	380	88-4-16156-00	2.7
	R38	390	88-5-16168-00	3.2

COP 131	Thread	Length	Product No	WEIGHT (KG)
	T38	443	88-A-15993-00	3.8

COP 1036, COP 1038, COP 1238	Thread	Length	Product No	WEIGHT (KG)
	R38	485	88-5-15962-00	4.3
	T38	485	88-A-15983-00	4.3
	T38	575	88-A-15981-00	4.8
	T38	575	88-A-15982-00	5.4
	T45	575	88-B-15996-00	5.8

SHANK ADAPTERS

COP 1440, COP 1550, COP 1638, COP 1838, COP 2238



Thread	Length	Product No	WEIGHT (KG)
R32	525	88-4-16088-00	4.1
R32	435	88-4-16087-00	3.6
R38	435	88-5-16098-00	3.9
T38	435	88-A-16120-00	3.8

COP 1838 MUX/HUX



Thread	Length	Product No	WEIGHT (KG)
T35	730	88-H-16559-00	9.4
T38	730	88-A-16474-00	9.6
T45	730	88-B-16475-00	9.9

COP 1640/1840



Thread	Length	Product No	WEIGHT (KG)
T38	565	88-A-16125-00	6.6
T45	565	88-B-16128-00	6.8
T51	565	88-C-16129-00	7.2

COP 2160EX / 2560EX



Thread	Length	Product No	WEIGHT (KG)
T51	770	88-C-30204-00	13.4
ST61/GT60	770	88-E-30204-00	14.4

MONTABERT

HC25 (FEMALE)



Thread	Length	Product No	WEIGHT (KG)
R32	202	88-4F-08208-00	1.9

HC40/HC 50



Thread	Length	Product No	WEIGHT (KG)
R38	372	88-5-1564-00	3.2

HC 80, HC 90, HC 105



Thread	Length	Product No	WEIGHT (KG)
R38	440	88-5-1756-00	3.9
T38	440	88-A-1756-00	3.8

HC 80, HC 110, HC 120



Thread	Length	Product No	WEIGHT (KG)
R38	415	88-5-1657-00	4.7
T38	415	88-A-1657-00	4.6
R38	460	88-5-1857-00	5.2
T38	460	88-A-1857-00	5.1

SHANK ADAPTERS

HC 80R, HC 105R, HC 107R, HC 108R,
HC 109R, HC110R, HC120R



Thread	Length	Product No	WEIGHT (KG)
T38	670	88-A-2795-00	6.9
T45	670	88-B-2795-00	7.2

DOOFOR

DF 528HD, DF 538S, DF 538L,



Thread	Length	Product No	WEIGHT (KG)
R32	470	88-4-19135-00	3.7

DF 550F, DF 550L, DF 540L



Thread	Length	Product No	WEIGHT (KG)
R32	515	88-4-20233-00	4.3
R38	515	88-5-20233-00	4.4

DF 545HD, DF 560



Thread	Length	Product No	WEIGHT (KG)
R32	515	88-4-20236-00	4.9
R38	515	88-5-20236-00	5.0
T45	515	88-B-20236-00	5.1

DF 545EXT HD, DF 540L-BLT, DF 560LEXT,
DF 560L-BLT



Thread	Length	Product No	WEIGHT (KG)
R32	582	88-4-23239-00	5.8
R38	582	88-5-23239-00	5.9
T38	582	88-A-23239-00	5.9

FURUKAWA

M 120, PD 200



Thread	Length	Product No	WEIGHT (KG)
T38	380	88-A-41761-00	3.7

HD 300



Thread	Length	Product No	WEIGHT (KG)
T38	655	88-A-41827-00	6.0
T45	655	88-B-41828-00	6.9

HD 609 (QED)



Thread	Length	Product No	WEIGHT (KG)
T38	795	88-A-41840-00	7.6

HD 609 (STD)



Thread	Length	Product No	WEIGHT (KG)
T38	690	88-A-41853-00	6.4
T45	690	88-B-41854-00	7.1

SHANK ADAPTERS

HD 612 (STD)	Thread	Length	Product No	WEIGHT (KG)
	T38	710	88-A-28112-00	8.6
	T45	710	88-B-28112-00	8.9

HD 709 (STD)	Thread	Length	Product No	WEIGHT (KG)
	T38	620	88-A-41898-00	6.4
	T45	620	88-B-41897-00	7.0

HD 712 (STD)	Thread	Length	Product No	WEIGHT (KG)
	T45	590	88-B-41858-00	8.1
	T51	590	88-C-41859-00	8.7
	T45	790	88-B-41876-00	9.5
	T51	790	88-C-41896-00	10.6

HD 712 (QED)	Thread	Length	Product No	WEIGHT (KG)
	T45	885	88-B-41913-00	12.4
	T51	885	88-C-41912-00	13.3

INGERSOLL RAND

YH 135 RP	Thread	Length	Product No	WEIGHT (KG)
	T51	950	88-C-48887-00	15.3

GARDNER DENVER-REEDRILL-CATERPILLAR

REEDRILL HPR 6030	Thread	Length	Product No	WEIGHT (KG)
	ST61/GT60	1040	88-E-48072-00	21.5

JUNJIN

JD 800	Thread	Length	Product No	WEIGHT (KG)
	T38	580	88-A-8620-00	5.6

TEI

TE360	Thread	Length	Product No	WEIGHT (KG)
	T38	420	88-A-SD360-00	8.6

Coupling Sleeves




SAI DEEPA

ROCK DRILLING TOOLS

— JUST DRILL! —


COUPLING SLEEVES

STANDARD COUPLING SLEEVE

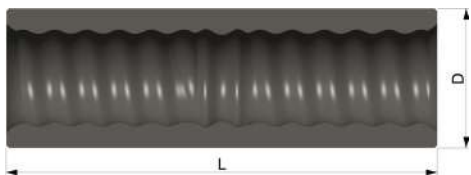

Thread Type	Dia	Length	Product No
R22	31	140	781-1R-31-140-F
R25	35	160	781-2R-35-160-F
R32	44	150	781-4R-44-150-F
R38	55	170	781-5R-55-170-F
T38	55	170	781-AT-55-170-F
T38	55	190	781-AT-55-190-F
T45	63	210	781-BT-63-210-F
T51	77	235	781-CT-77-235-F
T51	71	235	781-CT-71-235-F

REDUCTION COUPLING SLEEVE

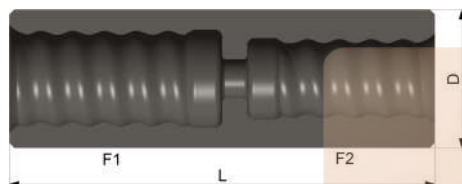

Thread Type		Dia	Length	Product No
F1	F2			
R32	R25	44	150	781-42R-44-150-F
R32	R28	44	165	781-43R-44-165-F
R38	R32	55	170	781-54R-55-170-F
T38	R32	55	195	781-A41-55-195-F
T38	R38	55	185	781-A51-55-185-F
T45	T38	58	180	781-BAT-58-180-F
T45	T38	61	180	781-BAT-61-180-F
T51	T45	71	218	781-CBT-71-218-F

BIT ADAPTERS




Thread Type		Dia	Length	Product No
F	M			
R25	R32	45	173	781-24R-45-173-4
R28	R32	40	230	781-34R-40-230-4
R32	R38	45	225	781-45R-45-225-4
R32	T38	45	225	781-4A1-45-225-4
T35	T38	48	250	781-HAT-48-250-4
R38	R32	55	270	781-54R-55-270-4
T38	R32	57	270	781-A41-57-270-4
T38	T45	57	285	781-ABT-57-285-4
T45	T38	63	265	781-BAT-63-265-4
T45	T51	63	285	781-BCT-63-285-4
T51	T45	71	285	781-CBT-71-285-4

COUPLING SLEEVE TYPE

STANDARD COUPLING SLEEVE

This coupling sleeve is very common in the industry standard. It connects two female threads like R32 – R32, T38-T38 etc.

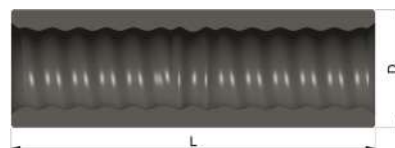

REDUCTION COUPLING SLEEVE

Reduction coupling sleeve is very common in the industry. It connects two different female threads like R32 – R38, T45-T38, T51-T38 etc.






The image displays a variety of industrial drilling equipment. The top half features several dark-colored extension rods of different lengths and diameters, some with threaded ends. The bottom half shows several orange-colored drill bits with multiple cutting edges and carbide inserts. The tools are arranged on a light, reflective surface. A large, semi-transparent logo is centered in the background, and a text box is overlaid on the left side.

Extension & Drifter Rods

SAI DEEPA
ROCK DRILLING TOOLS
— JUST DRILL! —


EXTENSION & DRIFTER RODS

EXTENSION RODS R32-ROUND32-R32 MM




Length	DIA (D)	Product No
MM	FT	
915	3'	58-4432-09
1220	4'	58-4432-12
1525	5'	58-4432-15
1600	5' 3"	58-4432-16
1830	6'	58-4432-18
2095	6' 10 1/2"	58-4432-21
2435	8'	58-4432-24
3050	10'	58-4432-31
3660	12'	58-4432-37

EXTENSION RODS R38-ROUND39-R38 MM




Length	DIA (D)	Product No
MM	FT	
1220	4'	58-5539-12
1830	6'	58-5539-18
2435	8'	58-5539-24
3050	10'	58-5539-31

EXTENSION RODS T38-ROUND39-T38 MM



Length	DIA (D)	Product No
MM	FT	
1220	4'	58-AA39-12
2435	8'	58-AA39-24
3050	10'	58-AA39-31
3660	12'	58-AA39-37

EXTENSION RODS T45-ROUND46-T45 MM



Length	DIA (D)	Product No
MM	FT	
1220	4'	58-BB46-12
1525	5'	58-BB46-15
2435	8'	58-BB46-24
3050	10'	58-BB46-31
3660	12'	58-BB46-37


EXTENSION RODS T51-ROUND52-T51 MM



Length	DIA (D)	Product No
MM	FT	
1220	4'	58-CC52-12
2435	8'	58-CC52-24
3050	10'	58-CC52-31
3660	12'	58-CC52-37


EXTENSION RODS MALE-FEMALE

EXTENSION RODS R32-ROUND32-R32 MF



Length	DIA (D)	Product No
MM	FT	
915	3'	58-4432-MF-09
1220	4'	58-4432-MF-12
1830	6'	58-4432-MF-18
2095	6' 10 1/2"	58-4432-MF-21
2435	8'	58-4432-MF-24
3050	10'	58-4432-MF-31
3660	12'	58-4432-MF-37


EXTENSION RODS T35-ROUND39-T35 MF



Length	DIA (D)	Product No
MM	FT	
1220	4'	58-HH39-MF-12
3050	10'	58-HH39-MF-31
3660	12'	58-HH39-MF-37

EXTENSION & DRIFTER RODS

EXTENSION RODS T38-ROUND39-T38 MF



Length	DIA (D)	Product No
1220	39	58-AA39-MF-12
1525	39	58-AA39-MF-15
1830	39	58-AA39-MF-18
2095	39	58-AA39-MF-21
2435	39	58-AA39-MF-24
3050	39	58-AA39-MF-31
3660	39	58-AA39-MF-37
4265	39	58-AA39-MF-43

EXTENSION RODS T45-ROUND46-T45 MF




Length	DIA (D)	Product No
1220	46	58-BB46-MF-12
1525	46	58-BB46-MF-15
1830	46	58-BB46-MF-18
2095	46	58-BB46-MF-21
2435	46	58-BB46-MF-24
3050	46	58-BB46-MF-31
3660	46	58-BB46-MF-37
4265	46	58-BB46-MF-43

EXTENSION RODS T51-ROUND52-T51 MF



Length	DIA (D)	Product No
1220	52	58-CC52-MF-12
1525	52	58-CC52-MF-15
1830	52	58-CC52-MF-18
2095	52	58-CC52-MF-21
2435	52	58-CC52-MF-24
3050	52	58-CC52-MF-31
3660	52	58-CC52-MF-37
4265	52	58-CC52-MF-43


EXTENSION ROD ST61/GT60-ROUND60-ST61/GT60 MF



Length	DIA (D)	Product No
1830	60	58-EE60-MF-18
3050	60	58-EE60-MF-31
3660	60	58-EE60-MF-37
4265	60	58-EE60-MF-43

DRIFTING & TUNNELING TOOLS

Bolting Rods R25-HEX25-R25







Length	HEX	Product No
1220	25	48-2225-12
1830	25	48-2225-18
2175	25	48-2225-22
2475	25	48-2225-25
3090	25	48-2225-31
3700	25	48-2225-37

Bolting Rods R32-HEX25-R25




Length	HEX	Product No
1220	25	48-4225-12
1830	25	48-4225-18
2000	25	48-4225-20
2175	25	48-4225-22
2475	25	48-4225-25
2785	25	48-4225-28
3090	25	48-4225-31
3700	25	48-4225-37

EXTENSION & DRIFTER RODS

Drifter Rods R32-HEX32-R28		Length		HEX	Product No
		MM	FT		
		3090	10' 1 5/8"	32	48-4332-31
		3700	12' 1 5/8"	32	48-4332-37
Drifter Rods R38-HEX32-R28		Length		HEX	Product No
		MM	FT		
		3090	10' 1 5/8"	32	48-5332-31
		3700	12' 1 5/8"	32	48-5332-37
Drifter Rods R38-HEX32-R32		Length		HEX	Product No
		MM	FT		
		2475	8' 1 1/2"	32	48-5432-25
		3090	10' 1 5/8"	32	48-5432-31
		3700	12' 1 5/8"	32	48-5432-37
		4305	14' 1 1/2"	32	48-5432-43
Drifter Rods T38-HEX32-R32		Length		HEX	Product No
		MM	FT		
		3090	10' 1 5/8"	32	48-A432-31
		3700	12' 1 5/8"	32	48-A432-37
		4305	14' 1 1/2"	32	48-A432-43
Drifter Rods R38-HEX35-R32		Length		HEX	Product No
		MM	FT		
		2475	8' 1 1/2"	35	48-5435-25
		3090	10' 1 5/8"	35	48-5435-31
		3700	12' 1 5/8"	35	48-5435-37
		4305	14' 1 1/2"	35	48-5435-43
Drifter Rods R38-HEX35-R28		Length		HEX	Product No
		MM	FT		
		2475	8' 1 1/2"	35	48-5335-25
		3090	10' 1 5/8"	35	48-5335-31
		3700	12' 1 5/8"	35	48-5335-37
		4305	14' 1 1/2"	35	48-5335-43
Drifter Rods T38-HEX35-R32		Length		HEX	Product No
		MM	FT		
		2475	8' 1 1/2"	35	48-A435-25
		3090	10' 1 5/8"	35	48-A435-31
		3700	12' 1 5/8"	35	48-A435-37
		4305	14' 1 1/2"	35	48-A435-43
Drifter Rods T38-HEX35-T35		Length		HEX	Product No
		MM	FT		
		2475	8' 1 1/2"	35	48-AH35-25
		3090	10' 1 5/8"	35	48-AH35-31
		4305	14' 1 1/2"	35	48-AH35-43


EXTENSION & DRIFTER RODS

Drifter Rods T38-HEX35-T38



Length		HEX	Product No
MM	FT		
2475	8' 1 1/2"	35	48-AA35-25
3090	10' 1 5/8"	35	48-AA35-31
3700	12' 1 5/8"	35	48-AA35-37
4305	14' 1 1/2"	35	48-AA35-43

Drifter Rods R22-HEX25-R25 MF



Length		HEX	Product No
MM	FT		
567	1' 10 1/3"	25	48-1225-MF-06

GUIDE TUBES

T38 GUIDE TUBE




Length		DIA (D)	Product No
MM	FT		
1220	4'	56	58-AA56-GT-12
1525	5'	56	58-AA56-GT-15
1830	6'	56	58-AA56-GT-18

T45 GUIDE TUBE



Length		DIA (D)	Product No
MM	FT		
1220	4'	64	58-BB64-GT-12
1830	6'	64	58-BB64-GT-18
3050	10'	64	58-BB64-GT-31
3660	12'	64	58-BB64-GT-37
3660	12'	76	58-BB76-GT-37


T51 GUIDE TUBE



Length		DIA (D)	Product No
MM	FT		
1830	6'	76	58-CC76-GT-18
3050	10'	76	58-CC76-GT-31
3660	12'	76	58-CC76-GT-37
3660	12'	87	58-CC87-GT-37


DRILL TUBES

ST58 DRILL TUBE



Length		DIA (D)	Product No
MM	FT		
1525	5'	76	58-FF76-DT-15
1830	6'	76	58-FF76-DT-18

ST61/GT60 DRILL TUBE

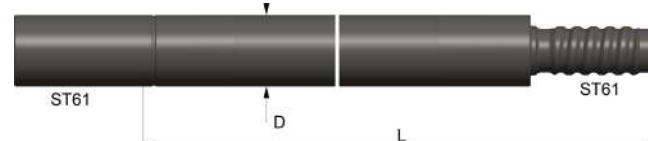

Length		DIA (D)	Product No
MM	FT		
4265	14'	87	58-EE87-DT-43

ST68 DRILL TUBE



Length		DIA (D)	Product No
MM	FT		
1525	5'	87	58-GG87-DT-15
1830	6'	87	58-GG87-DT-18

SPECIFICATION CHART

THREADED BIT

46

3

862

102

7

S

M

Diameter

Regular - 46
Retrac - 56,M6,H6

Thread Type

Thread	Code
R22	1
R25	2
R28	3
R32	4
R38	5
T38	A
T45	B
T51	C
ST61/GT60	E
ST58	F
ST68	G
T35	H

Flat

Gauge	FFH	SFH	GB	FB	Code
4 Gauge	1	2	4	2	421
	2	0	4	2	422
	1	1	4	2	423
	2	1	4	2	424
5 Gauge	1	1	5	2	521
	1	2	5	2	522
	2	1	5	2	523
	1	1	5	3	524
6 Gauge	2	1	6	2	621
	2	2	6	2	622
	1	1	6	3	623
	3	1	6	3	624
	2	0	6	4	625
	2	1	6	4	626
	3	0	6	3	627
	4	0	6	5	628
	3	2	6	3	635
	3	0	6	4	629
7 Gauge	2	0	7	5	751
	2	0	7	7	752
	3	0	7	4	753
	3	0	7	5	754
	2	1	7	5	755
8 Gauge	2	0	8	4	841
	2	1	8	4	842
	2	2	8	4	843
	4	0	8	6	844
	2	2	8	5	851
	2	0	8	5	852
	1	1	8	5	853
	2	1	8	5	854
	4	1	8	5	855
	2	0	8	6	861
	2	1	8	6	862
	2	2	8	6	863
	2	0	8	7	871
	2	0	8	8	881
	2	2	8	8	882
	4	0	10	8	082
	3	0	10	8	081
9 Gauge	2	0	9	5	951
	2	0	9	9	952
	2	0	9	10	953
	3	0	9	6	961
	3	1	9	6	962
	3	0	9	10	963
	3	0	9	7	971
	3	1	9	7	972
	3	0	9	9	991
	3	0	9	12	921
10 Gauge	3	0	10	7	071
12 Gauge	3	0	12	10	S01

Button Combination

BC	Code
9X7	Z
9X8	Y
9X9	X
10x8	W
10X9	V
10X10	U
11X8	T
11X9	S
11X10	R
11X11	1
12X10	2
12X11	3
12X12	4
13X11	5
14X12	6
14X13	7
14X14	8
16X12	9
16X14	Q

M - Flat Face with Face Millings
G - Flat Face with Grooves

Drop Center

Gauge	FFH	SFH	GB	FB	Code
6 Gauge	3	0	6	4	64E
	3	1	6	4	64D
	3	0	6	5	65D
	3	1	6	5	65E
	3	0	6	3	63F
8 Gauge	4	0	8	2	82D
	4	0	8	3	83D
	4	0	8	4	84D
	4	1	8	4	84E
	4	0	8	5	85D
	4	1	8	5	85E
	4	2	8	5	85I
	2	0	8	6	86D
	4	0	8	6	86E
	4	2	8	6	86I
	4	1	8	6	86F
	4	0	8	4X2	86G
	4	1	8	4X2	86H
	2	0	8	7	87D
	4	0	8	7	87E
	2	0	8	4X3	87F
	4	0	8	4X3	87G
	4	1	8	6X2	88D
	4	0	8	8	88F
	4	0	8	6X2	88E
9 Gauge	3	0	9	5	95D
	3	0	9	10	90F
	3	0	9	9	99F
10 Gauge	4	0	10	8	08D
	5	0	10	6	06D

Button Shape

Gauge	Face	Code
S	S	S
B	B	B
P	P	P
K	K	K
S	B	C
S	P	D
S	K	E
P	B	F

S - Spherical
B - Ballistic
P - Parabolic / Semi Ballistic
K - Spike / Conical

Convex

Gauge	FFH	SFH	GB	FB	Code
5 Gauge	1	1	5	2	52X
8 Gauge	2	1	8	6	86X
	2	1	8	7	87X
	2	1	8	8	88X
	2	1	8	4X5	89X
9 Gauge	3	0	9	8	98X


Concave

Gauge	FFH	SFH	GB	FB	Code
6 Gauge	3	0	6	5	K65
8 Gauge	2	0	8	7	K87
	2	0	8	6	K86


FFH - Face Flush Holes
SFH - Side Flush Holes
GB - Gauge Buttons
FB - Face BUTtons
BC - Button Combination

SPECIFICATION CHART


DOMESTIC BIT

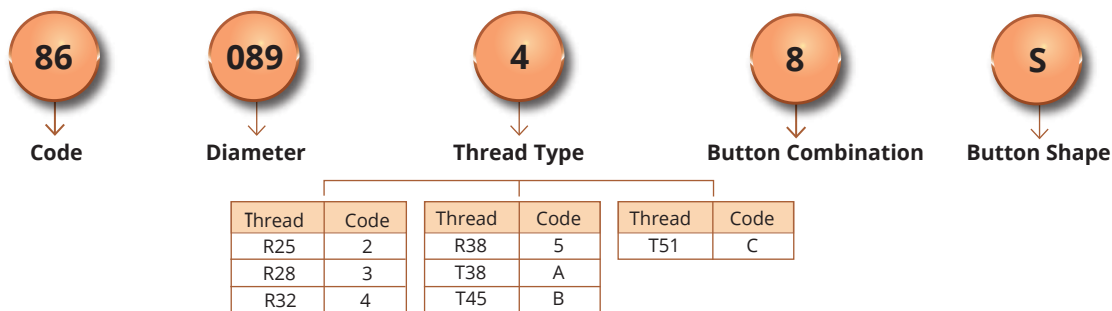


DOMESTIC REAMING BIT

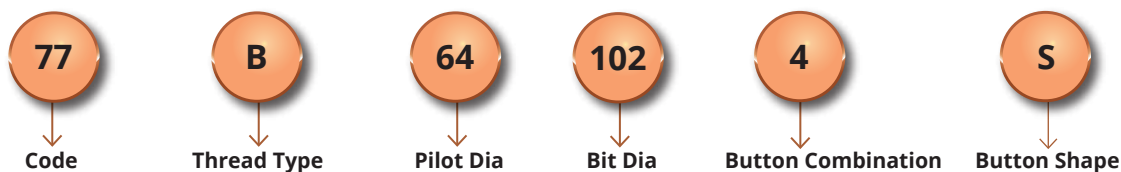


REAMING BIT

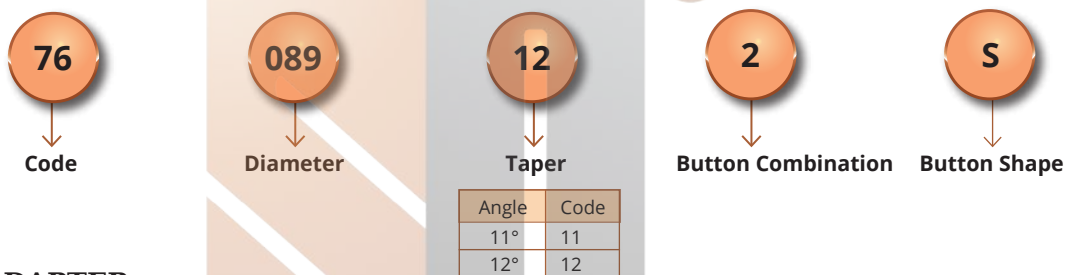

PILOT ADAPTER

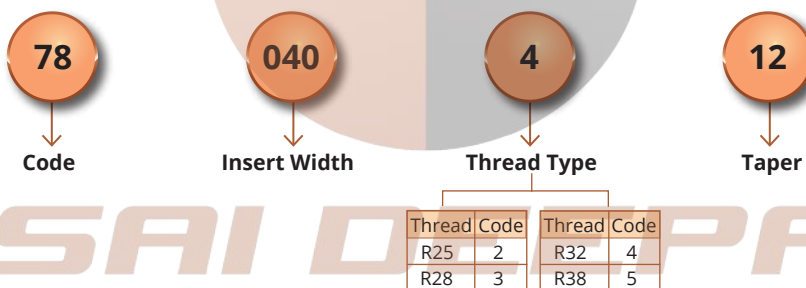

TAPER BIT

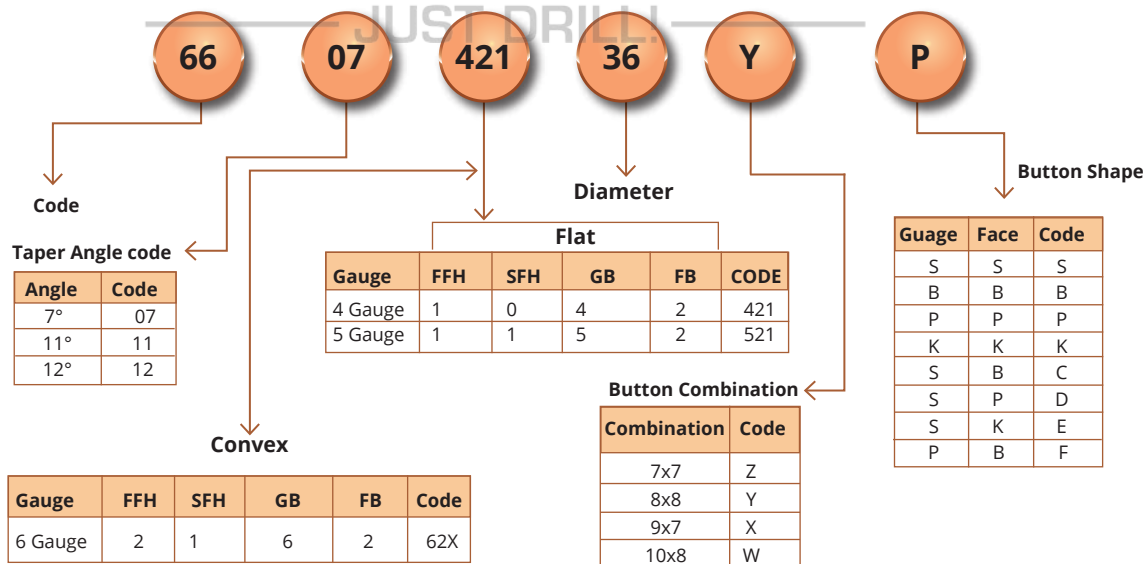

SPECIFICATION CHART

TAPER ROD

68

Code

12

Taper Degree

22

HEX

18

Length

DRIFTING & TUNNELING ROD

48

Code

4-3-32

Code

T1	T2	HEX
R32	R28	32

MF

Extension Type

31

Length	Ex:
31	3090

EXTENSION ROD

58

Code

4-4-32

Code

T1	T2	OD
R32	R32	32

MF

Extension Type

09

Length	Ex:
09	915
12	1220

SHANK ADAPTER

88

Code

3

Thread	Code	Thread	Code	Thread	Code
R25	2	R32	4	T45	B
R28	3	R38	5	T51	C
		T38	A		

3652-01

Ref. No

COUPLING SLEEVES

781

Code

3

Thread	Code	Thread	Code
R22	1	R32	4
R25	2	R38	5
R28	3	T38	A

R

Thread	Code	Thread	Code
T45	B	RR	R
T51	C	TT	T
		TR	1

44

OD Diameter

140

Sleeve Length

F

Thread	Thread
FF	F
FM	4

NOTES



SAI DEEPA

ROCK DRILLING TOOLS

— JUST DRILL! —

Corporate Social Responsibility



We believe CSR is not a charity It is the necessity



SAI DEEPA

ROCK DRILLING TOOLS

— JUST DRILL! —



SAI DEEPA
ROCK DRILLING TOOLS
— JUST DRILL! —

SAI DEEPA ROCK DRILLS PVT. LTD.

Plot no 106 & 107, Phase II
IDA Cherlapally, Hyderabad – 500051
Telangana, India.

Ph : +91-40-27260217
+91-40-27260438
Fax : +91-40-27261231

Email: info@saideepa.com
sales@saideepa.com
Web: www.saideepa.com

ISO 9001: 2015 | 14001:2015 | 45001:2018 | 27001:2013

